



CX-15

Product Description

Portable and installed PA loudspeakers used in applications including sound reinforcement in Houses of Worship, Events, Clubs, Rehearsal Halls and Ballrooms etc. The CX-15 deliver extraordinary performance at unmatched value.

Applications

Houses of Worship, Rehearsal Halls, Events, Clubs, Ballrooms


Features

- High Output SPL and Sensitivity
- High Power low frequency transducer
- Multi purpose cabinet design
- Use as a main system with or without sub speaker

Specifications

Rated Power	450W (RMS)
Construction	15mm multilayered Plywood
LF Driver	1 × 15 Coaxial, 3"VC, Ferrite Magnet
HF Driver	1 × Coaxial, 1.5"VC, Ferrite Magnet
Crossover	2.1 kHz
Frequency Response (-3dB)	60Hz - 20 kHz
Maximum Peak Output	128 dB
Rated Impedance	8Ω
Dispersion (H × V)	70° × 70°
Connector	2 × NL4R Speakon
Packaging Dimensions (L×B×H)(cms)	50 × 46 × 84
Net Weight	27 kgs
Gross Weight	30 kgs

Frequency Response

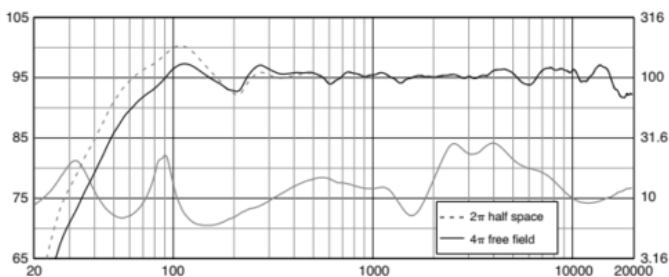

Dimensions

