





Frequency Response

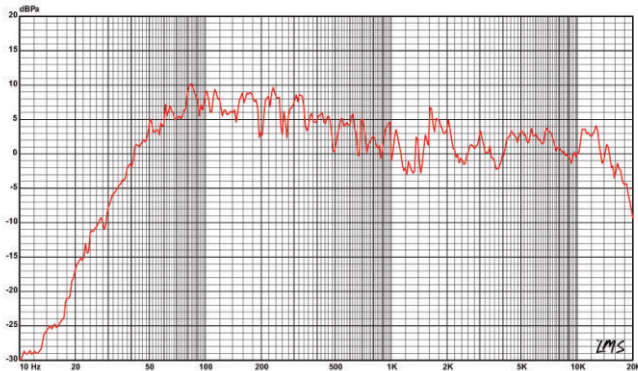

Dimensions

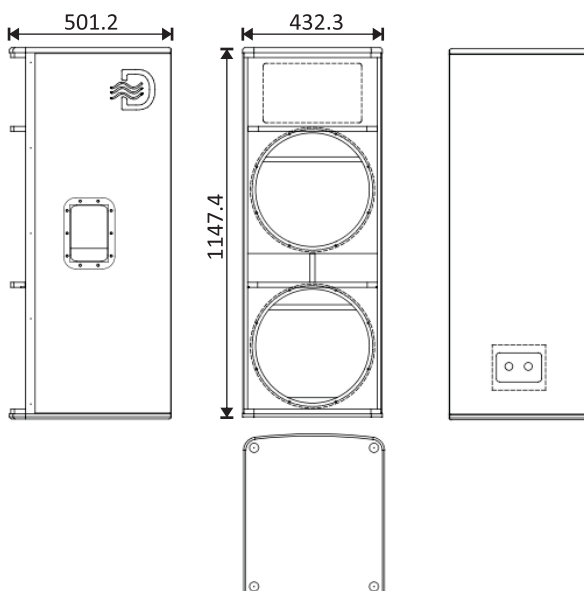

DEL-215

Product Description

Portable and installed PA loudspeakers used in applications including sound reinforcement in Houses of Worship, Events, Clubs, Rehearsal Halls and Ballrooms etc. The DEL Series deliver extraordinary performance at unmatched value.

Applications

Houses of Worship, Rehearsal Halls, Events, Clubs, Ballrooms

Features

- High Output SPL and Sensitivity
- High Power low frequency transducer
- Multi purpose cabinet design
- Use as a main system with or without sub speaker

Specifications

Rated Power	700W (RMS)
Construction	15mm Multilayered Plywood
LF Driver	2×15", 3"VC, Ferrite Magnet
HF Driver	1×1.4" exit, 2.5"VC, Ferrite
Crossover	2.2 kHz
Frequency Response (-3dB)	50Hz - 18 kHz
Maximum Peak Output	136 dB
Rated Impedance	4Ω
Dispersion (H × V)	90° × 50°
Connector	2 × NL4R Speakon
Packaging Dimensions (L×B×H)(cms)	59 × 52 × 127
Net Weight	45 kgs
Gross Weight	50 kgs