



Sub-12D

Product Description

Portable and installed PA loudspeaker used in application including sound reinforcement in Houses of Ballrooms etc. The Sub series delivers extraordinary performance at unmatched value.

Applications

Houses of Worship, Rehearsal Halls, Events, Clubs, Ballrooms


Features

- High Output SPL and Sensitivity
- High Power low frequency transducer
- Built-in power amplifier module
- Master Volume control
- Phase switch

Specifications

Rated Power	400W (RMS)
Construction	15mm Multilayered Plywood
Transducers	1 × 12", 3"VC, Ferrite Magnet
Frequency Response (-3dB)	45 Hz - 300 Hz
Maximum Peak Output	128 dB
Crossover Frequency	80Hz - 200Hz Adjustable
Connector	2 × XLR; RCA
Packaging Dimensions (L×W×H)(cms)	54 × 44 × 56
Net Weight	31 kgs
Gross Weight	34 kgs

Frequency Response

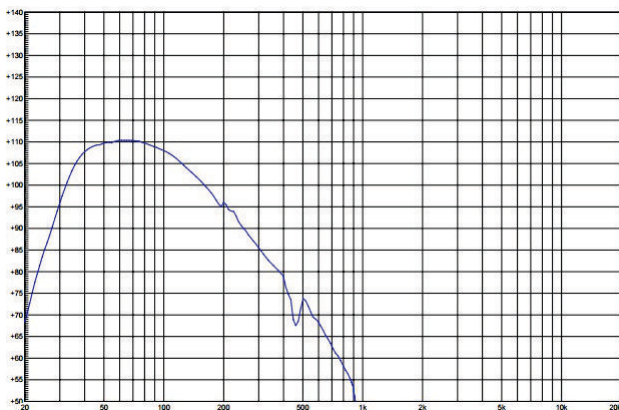

Dimensions

