

## Sub-15D

### Product Description

Portable and installed PA loudspeaker used in application including sound reinforcement in Houses of Ballrooms etc. The Sub series delivers extraordinary performance at unmatched value.

### Applications

Houses of Worship, Rehearsal Halls, Events, Clubs, Ballrooms


### Features

- High Output SPL and Sensitivity
- High Power low frequency transducer
- Built-in power amplifier module
- Master Volume control
- Phase switch

### Specifications

Rated Power	600W (RMS)
Construction	18mm Multilayered Plywood
Transducers	1 × 15", 4"VC, Ferrite Magnet
Frequency Response (-3dB)	40 Hz - 300 Hz
Maximum Peak Output	130 dB
Crossover Frequency	80Hz - 200Hz Adjustable
Connector	2 × XLR; RCA
Packaging Dimensions (L×W×H)(cms)	64 × 49 × 64
Net Weight	49 kgs
Gross Weight	52 kgs

### Frequency Response

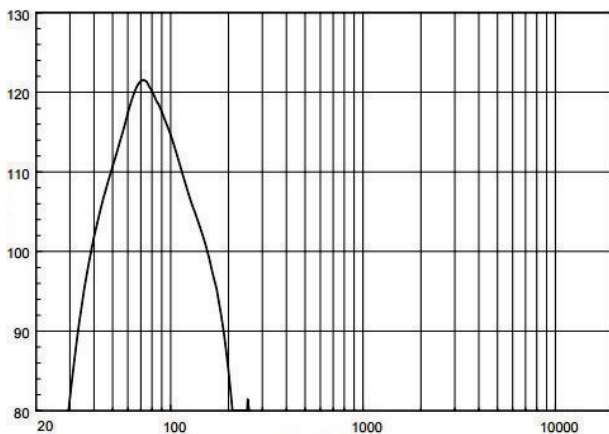

### Dimensions

